



NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	RE-ISSUE	L. LOPEZ	2/02
2	ADDED PLACEMENT DETAIL 3	L. LOPEZ	6/08
3			
4			

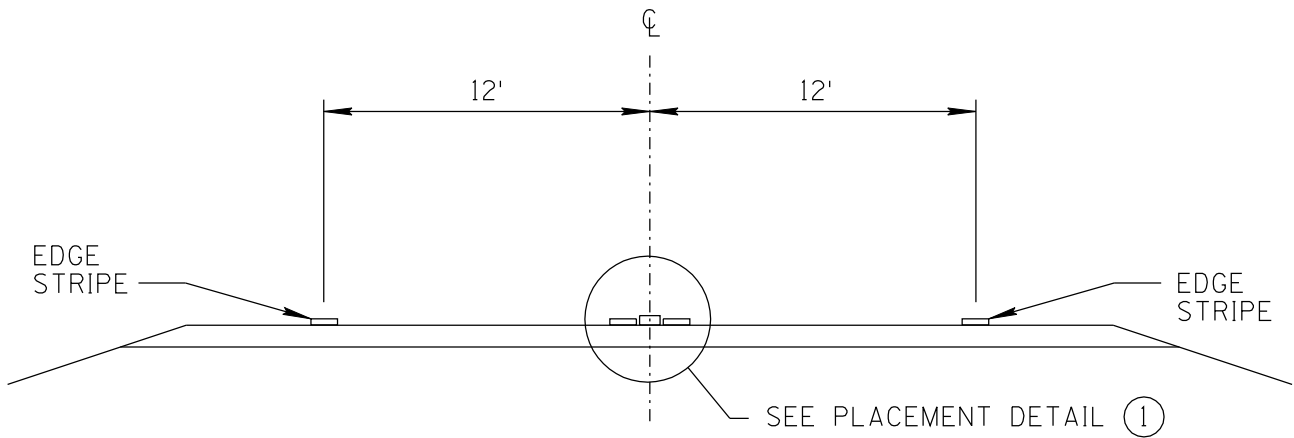



TYPICAL CROSS-SECTION

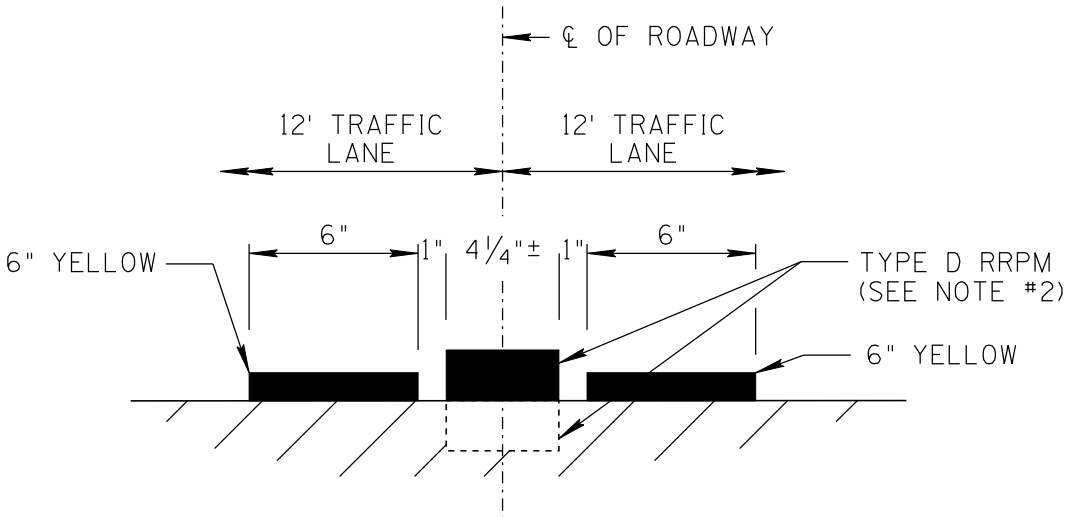

PLACEMENT DETAIL 1

NOTES:

1. ALL ROADWAYS SHOWN ARE 2-WAY UNLESS OTHERWISE NOTED.
2. APPLICABLE TO BOTH RAISED AND RECESSED PAVEMENT MARKERS.
3. PLACEMENT OF TYPE E (EDGELINE) RETROREFLECTIVE PAVEMENT MARKERS SHALL BE UNIFORM AND PARALLEL TO THE EDGE STRIPE BETWEEN THE LIP OF PAVEMENT AND RUMBLE STRIP. SEE PLACEMENT DETAIL 2 ON THIS SHEET. PAVEMENT MARKERS CAN BE INSTALLED IN THE RUMBLE STRIP IF NECESSARY.
4. SEE STANDARD DRAWING M-18 FOR RECESSED APPLICATIONS.
5. TYPE E PAVEMENT MARKERS ARE TO BE PLACED A MINIMUM OF TWO INCHES CLEAR FROM THE LIP OF THE PAVEMENT ON EITHER SIDE.

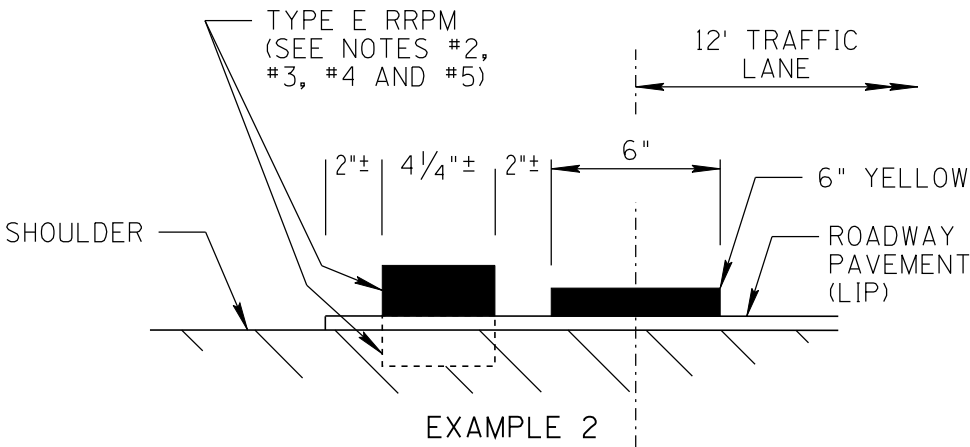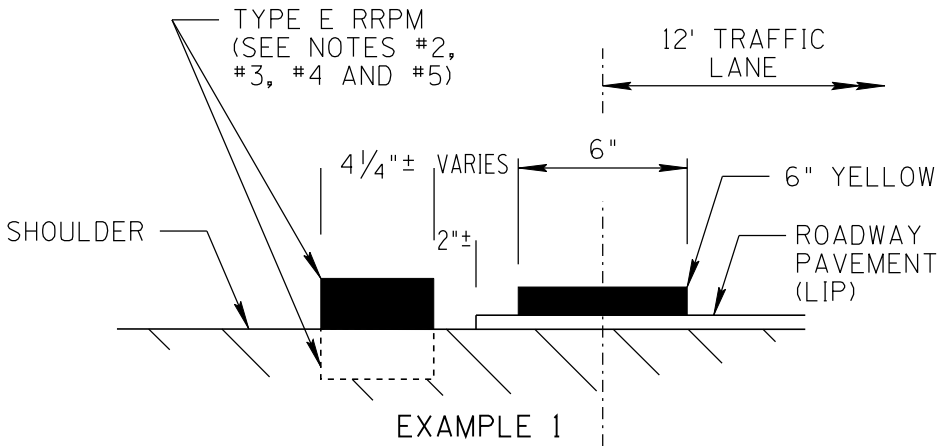

PLACEMENT DETAIL 2

ONE WAY
FREEWAY TRAFFIC ONLY
SEE NOTES

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION STANDARD DRAWINGS	REV. 6/08
APPROVED FOR DISTRIBUTION SIGNATURE ON FILE		DRAWING NO. M-19